# TIBA
PARKING SYSTEMS

# VPS-60
## VEHICLE PAY STATION



### FAST

- In-lane ticket processing and pay station (credit card and cash) designed for high-throughput, unattended parking operations

- Calculates and displays parking fees

- Supports ticketless operation

- High-resolution 10.1" color touch screen supports: ticketless, rate display, prepay options, and help services

- Prints patron receipt on demand

- Embedded Voice Over IP intercom and Pinhole IP camera

### FLEXIBLE

- Two or three denomination bill dispenser

- Numerous credit card solutions including: Mag-Stripe, P2PE EMV with or without pin pad, and NFC

- Various access credentials include: LPR, HID Proximity, Mifare, Mag-Stripe Room Key, QR barcodes, BLE, AVI, and drivers license

- Supports validation barcode stickers and coupons, reservations, vouchers

- Surge protection built in

### CREDIBLE

- Rugged, tamper resistant stainless steel housing

- O/S less embedded technology

- FCC, CE, UL, CSA certified
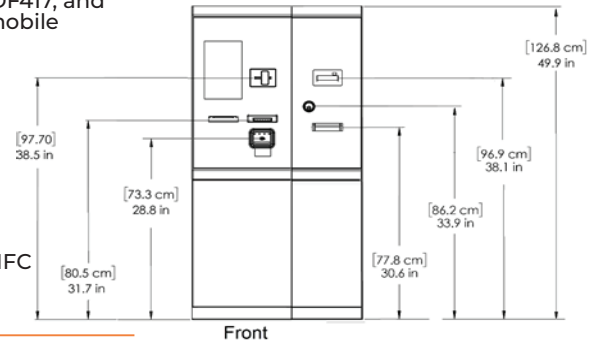
- PCI 3.2 compliant

- ADA compliant

## About the New TIBA X60 Series.

- Smarter and faster than ever with new product architecture.

- Increased security to protect your data.

- Connectivity using native TCP/IP and RS485.

- User engagement through extra-large, high contrast touch screen.

- Easy to install, service, and maintain.

- Backward compatibility. Seamlessly mix X30 and X60 devices.

- New technology. More features at a lower cost of ownership.

* Not all features are available or standard in all regions. Check with your local TIBA representative for availability.

# VPS-60 VEHICLE PAY STATION

## FEATURES

| | |
|---|---|
| Driver Instruction Display | 10.1" high-resolution color touch screen display |
| Ticket Issuing | Thermal ticket printer, roll supports up to 5,000 paper tickets |
| Card Holder Access | Bluetooth, Proximity, Mifare, AVI, barcode |
| Receipt Printer | For receipts and lost tickets |
| LPR Imaging | Supported |
| Barcode Scanner | Reads multiple barcode formats - 1D & 2D, QR, PDF417, and more. Supports various barcode credentials via mobile device or paper |
| Data Line Surge Protection | Built-in |
| Heater and Thermostat | Supported |
| Hotel Room Keys | Supported |
| Pin Hole Camera | Built-in |
| Intercom | Built-in VoIP |
| Credit Card Payments | Mag-Stripe, P2PE EMV with or without pin pad, NFC |

[126.8 cm] 49.9 in
[97.70] 38.5 in
[73.3 cm] 28.8 in
[80.5 cm] 31.7 in
[96.9 cm] 38.1 in
[86.2 cm] 33.9 in
[77.8 cm] 30.6 in
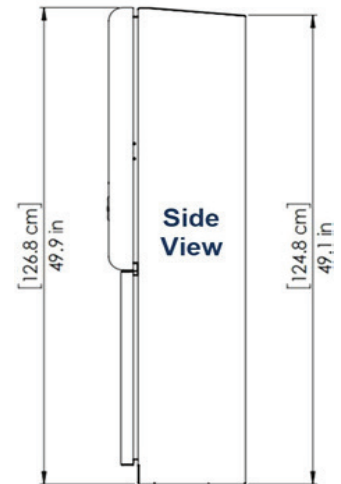
Front

## OPERATIONS

| | |
|---|---|
| Processor | High-speed embedded industrial processor |
| Operating System | O/S Less |
| Communication and Network | Native TCP/IP Ethernet, or RS-485 Communication |
| Built-In Clock | Lithium-ion battery |
| Off-Line Operation | Off-line functionality supported |
| Remote Monitoring | Real-time transaction and events monitoring via Facility Management System |

## HOUSING

| | |
|---|---|
| Construction | Stainless steel |
| Measurements | 25.3" (64.4 cm) W; 13.1" (33.4 cm) D; 49.9" (126.7 cm) H |
| Weight | Dependent on components selected |
| Color (Housing) | Standard: White RAL 9010 |
| Faceplate | High-grade epoxy-based TIBA standard or custom design |
| Locks | Keyed device lock |

[126.8 cm] 49.9 in
[124.8 cm] 49.1 in

Side View

## ELECTRICAL

| | |
|---|---|
| Voltage | 100-240 VAC, 50-60 HZ |
| Current | 5.3A approximate max. (with heater) |
| Power Consumption | 650W (with heater) |

## ENVIRONMENTAL CONDITIONS

| | |
|---|---|
| Operating Temperature | -4° to 122°F (-20° to 50°C) with heater |
| IP Rating | 54 |

## REGULATORY

| | |
|---|---|
| Safety | UL 60950-1:2007<br>CAN/CSA-C22.2 No. 60950-1-07 |
| EMC | CE, FCC Part 15, Subpart B, Class B |